

# Morsø 8643 Freestanding Wood Burning Fireplace



The information in this specifications guide is to assist you in your choice of a suitable fire. It is not intended to be all the information required to install the fire and does not replace the installation manual which provides more detailed information.

Appliance Width	525mm
Appliance Depth	451mm
Appliance Height	1083mm
Firebox Opening Size	450mm W x 180-300mm D x 260-360mm H
Glass Viewing Area	460mm W x 345mm H




Est. Heating Area	100-150m <sup>2</sup>
Efficiency	66.0%
Average Particulate Emission	0.5g/kg
Appliance Weight	150kg
Maximum Log Size	400mm
Flue Size	150mm
Flue Position	Top/Rear Flue
Flue Kit	6" Flue with 8" Solid Casing


Heat Shield	N/A
Fire Bricks	Vermiculite
Exterior Air Connection	Ø98mm



A floor protector constructed from a minimum 6mm thick compressed board sheet with a thermal resistivity of 0.26m<sup>2</sup> made from a non-combustible and heat resistant material is required. The floor protector must be continuous and extend fully beneath the appliance following the dimensions detailed below.

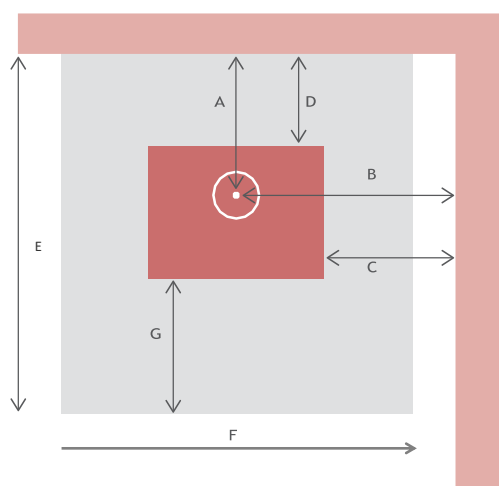

Morsø 8643	
A	426mm
B	762mm
C	575mm
D	200mm
E	750mm
F	845mm
G	300mm

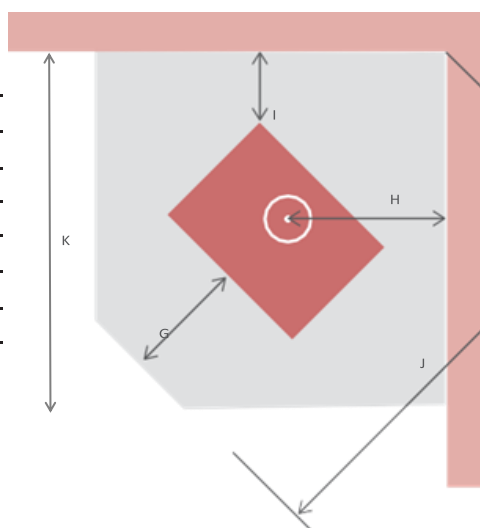

Morsø 8643	
G	300mm
H	670mm
I	350mm
J	1175mm
K	830mm

## STORAGE

Combustible material cannot be stored closer than 150mm below the firebox in the wood storage area.



[www.castworks.com.au](http://www.castworks.com.au)

Tel. (03) 9588 1169. [www.facebook.com.au/castworksaustralia](http://www.facebook.com.au/castworksaustralia) [twitter.com/CastworksPtyLtd](https://twitter.com/CastworksPtyLtd) | [www.instagram.com/castworks\\_](http://www.instagram.com/castworks_)

In the interest of product development Morsø reserves the right to change specifications without prior notice.